




TACT Switch

Order Information

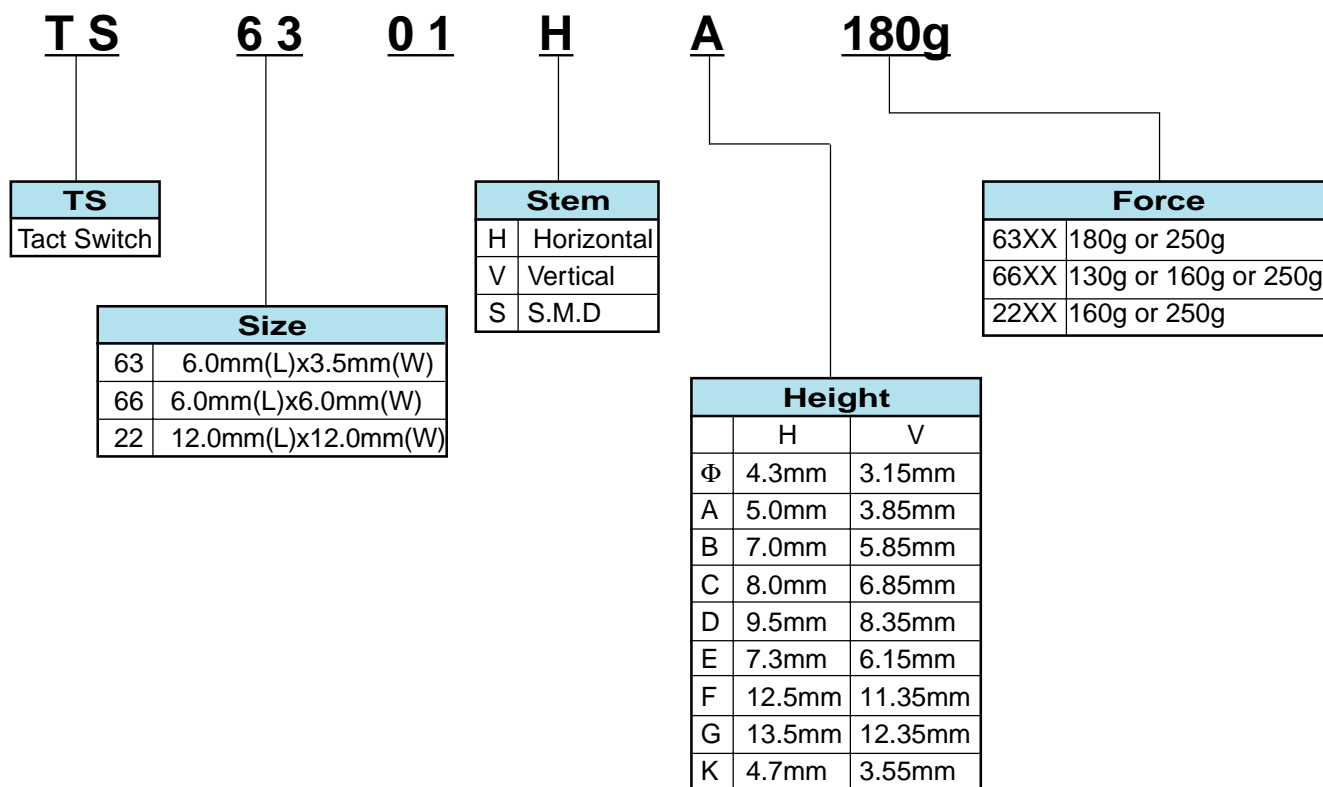

Ratings

DIP Type	TS 6301	TS 6601	TS 2201
Rating	DC 12V. 50mA	DC 12V. 50mA	DC 12V. 50mA
Travel	0.25 ± 0.1m/m	0.25 ± 0.1m/m	0.3 ± 0.15m/m
Operating Force	180g ± 30g or 250gf ± 50gf	130 or 160 ± 30g, 250 ± 50gf	160. 250g ± 50gf
Contact Resistance	100mΩMAX	50mΩMAX	100mΩMAX
Life	50,000 Cycles	100,000 500,000 1,000,000 Cycles	1,000,000 500,000 1,000,000 Cycles

SMD Type	TS 6627	TS 6647	TS 4417
Rating	DC 12V. 50mA	DC 12V. 50mA	DC 12V. 50mA
Travel	0.25 ± 0.1m/m	0.25 ± 0.1m/m	0.2 ± 0.1m/m
Operating force	160 or 250gf ± 30gf	130 or 160 or 250 ± 30gf	160 or 250 ± 30gf
Contact Resistance	50mΩ MAX	50mΩ MAX	50mΩ MAX
Life	1,00,000,500,000,1,000 Cycles	100,000 500,000 1,000,000 Cycles	100,000 Cycles